


The core panel is a high-density rock wool of 45 kg/m³, lined on both sides by a 0,7 mm thickness galvanized sheet finished with a decorative low flame spread PVC foil on visible face.


It may be manufactured in different length ranges up to 3000 mm, even in some cases could be 4000 mm. The NAVALIBER B-0 ceiling is remarkable not only because of its mobility but also because of its strength.




Section

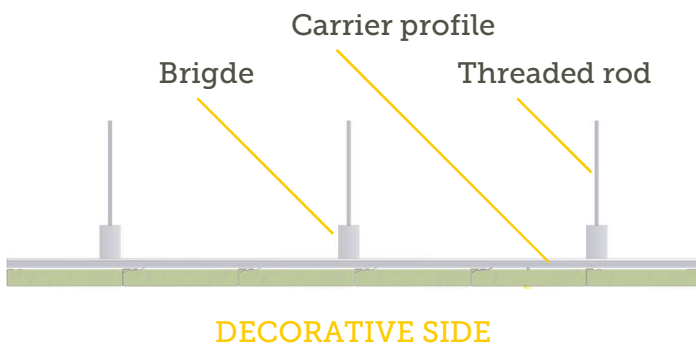

Some B-0 class ceiling supporting profiles

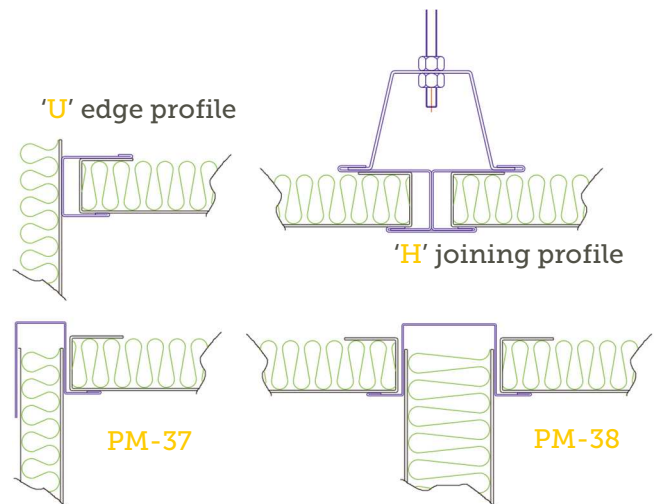

TECHNICAL FEATURES	B-0 class
Linings	0,7 mm
Standard finishing	150 µm PVC film
Insulation	rock wool
Max. length	3000 mm
Width	97 ⁽¹⁾ / 197 ⁽¹⁾ / 297 mm
Thickness	30 mm
Weight	11 kg/m ²
Classification	B-0

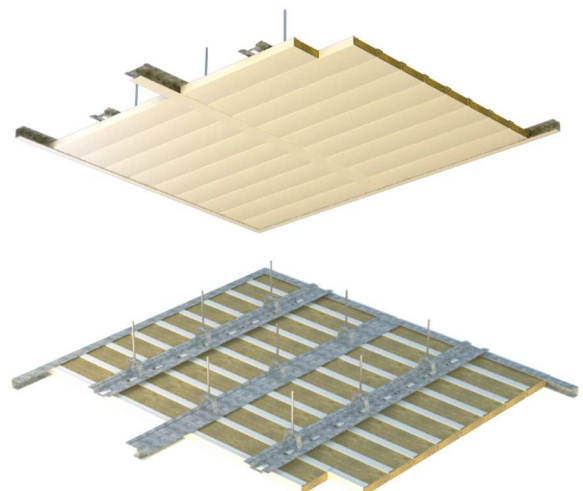

¹ 97 and 197 mm width are available on request.