


The core panel is a high-density rock wool of 45 kg/m<sup>3</sup>, lined on both sides by a 0,7 mm thickness galvanized sheet finished with a decorative low flame spread PVC foil on visible face.


It may be manufactured in different length ranges up to 3000 mm. The NAVALIBER C class ceiling is remarkable not only because of its mobility but also because of its strength.




Continuous section

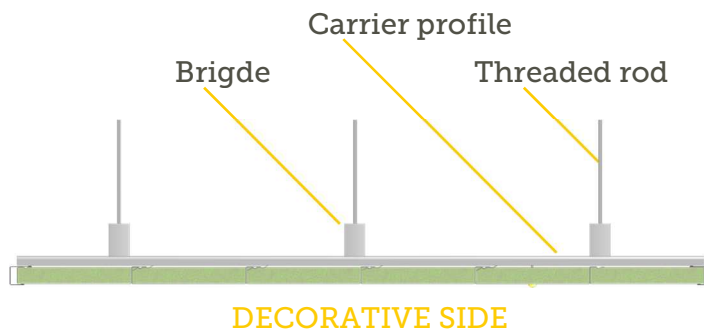

Groove section; spaces of 20 mm

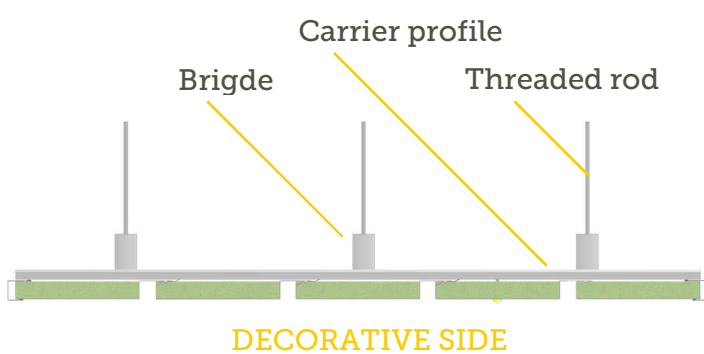

Some C-class ceiling supporting profiles

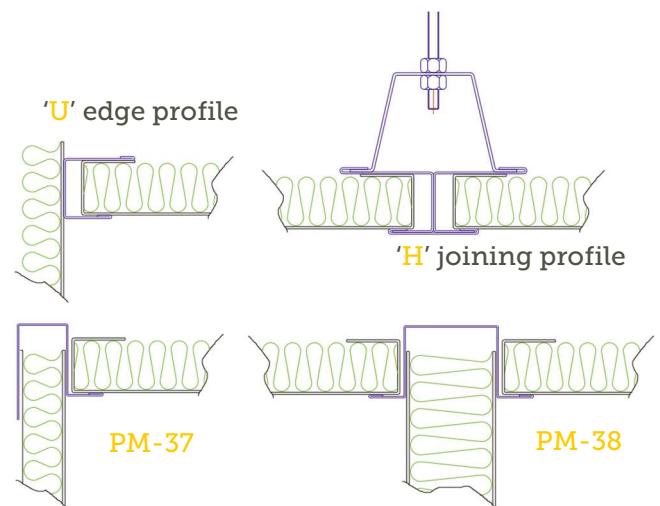

TECHNICAL FEATURES	C-class
Linings	0,7 mm
Standard finishing	150 µm PVC film
Insulation	rock wool
Max. length	3000 mm
Width	197 or 297 mm
Thickness	30 mm
Weight	11 kg/m <sup>2</sup>
Classification	C

