


The core panel is a high-density rock wool of 150 kg/m³, lined on both sides by a 0,7 mm thickness galvanized sheet finished with a decorative low flame spread PVC foil on visible face.


It may be manufactured in different length ranges up to 2500 mm, being remarkable not only because of its mobility but also because of their acoustic and thermal insulation.



Section

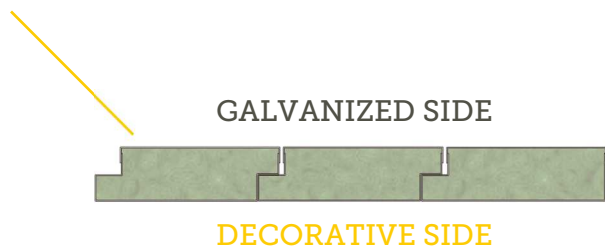

Some C ceiling supporting profiles

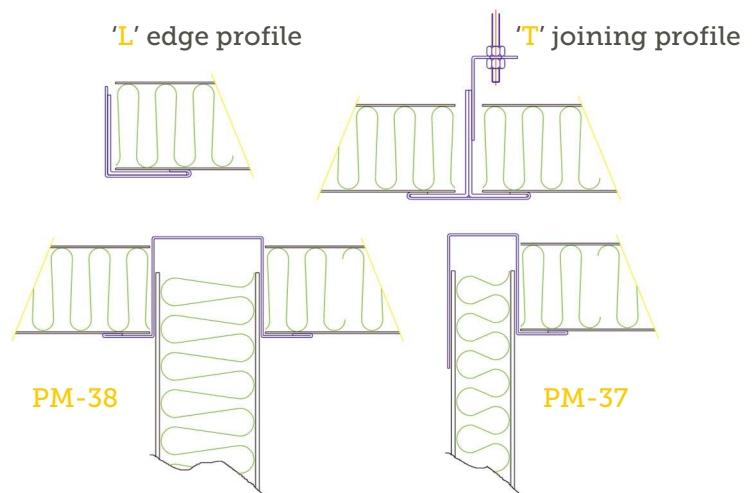

TECHNICAL FEATURES	C-class self-supporting
Linings	0,7 mm
Standard finishing	150 µm PVC film
Insulation	rock wool
Max. length	2500 mm
Width	From 200 up to 400 mm
Thickness	25 / 30 mm
Weight	16 / 17 kg/m ²
Classification	C

