

The ISOLIBER 3B-15 wall panel is specially designed as partition for accommodation projects.

Partition system of high noise reduction B-15 class with a single panel of 50 mm total thickness.


The core panel is made of rock wool, lined on both sides by a 0,7 mm or 1 mm thickness galvanized sheet finished with a decorative low flame spread PVC foil on both visible faces. Colours according with project.

The system is completed with all the necessary profiles for the installation.

Bent panels or panels with special dimensions can be supplied.



PM-01 Joint panel

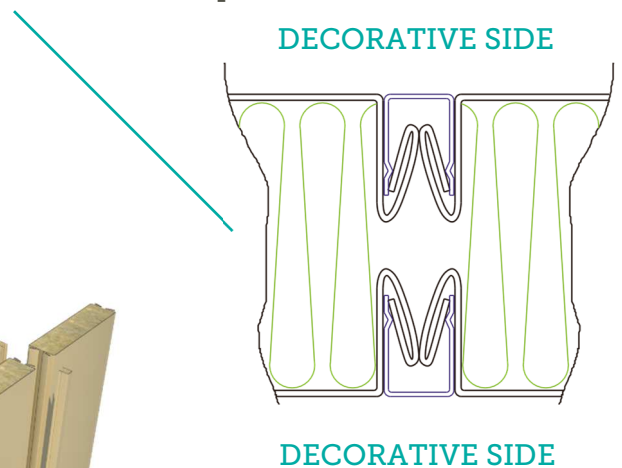

TECHNICAL FEATURES	3B-15 acoustic — 38 dB	3B-15 acoustic — 40 dB
Linings	0,7 mm	1 mm
Standard finishing	150 µm PVC film	150 µm PVC film
Insulation	rock wool	rock wool
Max. length	3000 mm	3000 mm
Max. width	600 mm	600 mm
Thickness	50 mm	50 mm
Weight	19 kg/m ²	24 kg/m ²
Noise reduction	38 dB ⁽¹⁾	40 dB ⁽²⁾
Classification	B-15	B-15

¹ According to acoustic test ref. CTA 243/08/AER and method of test UNE-EN ISO 140-3:1995.

² According to acoustic test ref. CTA 244/08/AER and method of test UNE-EN ISO 140-3:1995.